

- 1. Weatherboards must be coated with at least one coat all sides prior to fixing.
- 2. Fixing points must be pre-drilled minimum 1mm smaller than the fastener.
- 3. Cut ends and exposed timber must be sealed with an approved coating or end seal.

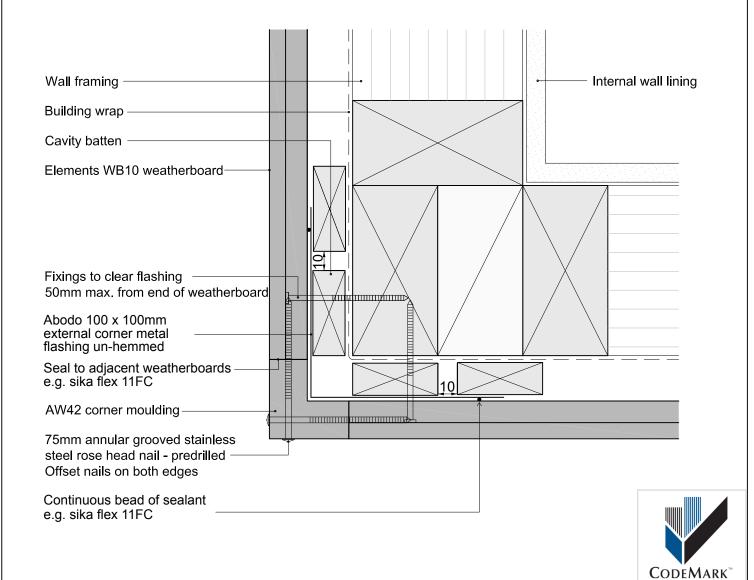



External 90° Corner - AW42 Moulding

Scale 1:2

Date 14/06/16

CMA-CM40070



© 2013 Abodo Wood Ltd, PO Box 8961, Symonds St, Auckland 1052 Ph 64 9) 302 9555 Fx 64 9) 302 9550 www.abodo.co.nz

Drawing No. HH.C.F.24